

Description

Hydraulic units specially designed for jet-stream currents. Range compatible with ESPA Pool Nadorsel and Wiper3 pumps. Easily installed in any type of pool.

Components

Kit NCB

Positionable nozzle. Pneumatic button for turning pump on and off. Air regulator for creating a bubble effect via a capillary tube.

Joints and blind plugs for installation in lined or concrete pools. Hose kit (optional).


Kit NC

Round (Kit NC R) or square plate (Kit NC C). Plate-mounted positionable nozzle with flow regulator.


Plate-mounted pneumatic button and air regulator.

Joints and blind plugs for lined pools (Kit NC RL, Kit NC CL); bushings for concrete pools (Kit NC RH, Kit NC CH). Hose kit (optional).

Kit NC Jet-stream current

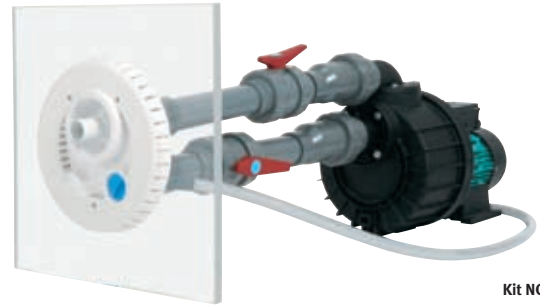


Kit NC RL + Nadorsel

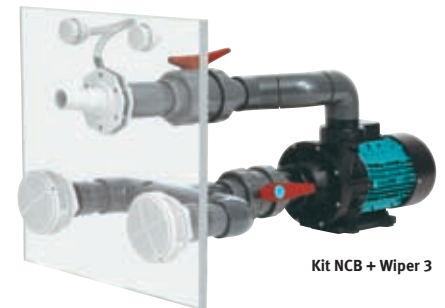

Kit NCB + Wiper 3


Pump Model	Reference		I (A)			P1 (kW)		P2		c (μF)	Ø Suc. (mm)	Unitary packaging		
	Single-phase	Three-phase	230 V	230 V	400 V	1~	3~	(kW)	(HP)			m ³	Kg	u/pallet
Wiper3 150	97851	97848	6,4	5,0	2,9	1,4	1,4	1,1	1,5	25	63	0,048	16,2	18
Wiper3 200	97859	97856	8,6	6,6	3,8	2,0	1,9	1,5	2,0	30	63	0,048	17,0	18
Wiper3 300	129316	129315	11,0	7,3	4,2	2,6	2,4	2,2	3,0	60	63	0,048	18,8	18
Nadorsel 200	96985	96984	10,2	6,7	4,0	2,2	2,2	1,5	2,0	40	63	0,101	25,1	8
Nadorsel 300	96987	96986	13,4	8,6	5,0	3,0	3,0	2,3	3,0	60	63	0,101	26,1	8
Nadorsel 400	-	96988	-	11,8	6,0	-	3,4	3,0	4,0	-	63	0,101	28,0	8

Kit NC Model	Reference	Type of pool	Ø Imp. (mm)	Ø Suc. (mm)	Ø outlet (mm)	Unitary packaging		
						m ³	Kg	u/pallet
KIT NCB	130632	lined/concrete	50	-	40	0,013	1,3	24
KIT NC RL	104158	lined	63	63	40	0,053	4,0	24
KIT NC RH	134543	concrete	63	63	40	0,053	4,9	24
KIT NC CL	104154	lined	63	63	40	0,053	4,0	24
KIT NC CH	134020	concrete	63	63	40	0,053	4,9	24

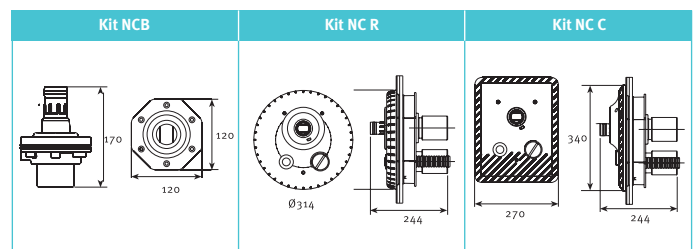

Accessory model	Reference	Description	Unitary packaging		
			m ³	Kg	u/pallet
NCB AL	130634	Suction for Kit NCB in lined pool *	0,005	2	24
NCB AH	130633	Suction for Kit NCB in concrete pool *	0,005	2	24
NC M	104153	1,5 m hydromassage hose	0,005	2	24

* We recommend 2 units per kit. See regulations for country in question

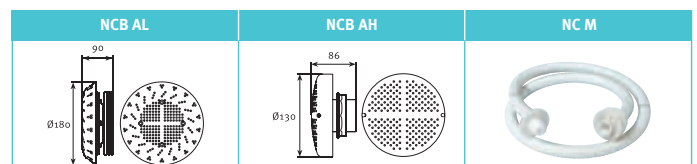

Control panel model	Reference	P1 (kW)		Dimensions			Unitary packaging		
		1~	3~	A	B	C	m ³	Kg	u/pallet
NC CM 2	134548	2,2	-	160	190	113	0,004	2	24
NC CT 2	134549	-	2,2	160	190	113	0,004	2	24
NC CT 3	137584	-	3,0	160	190	113	0,004	2	24

